


SCODIX FILE PREPARATION

SUPPLYING ARTWORK WITH SCODIX ELEMENTS


When creating Scodix artwork, supply an extra page in your PDF with a duplicate of the elements you wish to enhance. This should be set as a **Spot Colour** named **Scodix**. For example, business cards would need to be supplied as 4 pages within one PDF in the order shown below. This is to ensure pages are in the correct order when backing up your artwork.

For Scodix to be applied to the front page:

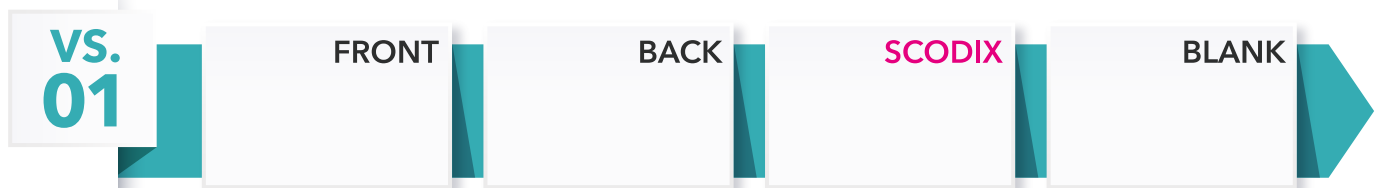


First page including the front design of your business card. Second page including the back design. Third page with the Scodix element set in a spot colour. Fourth page left blank.

For Scodix to be applied to the back page:

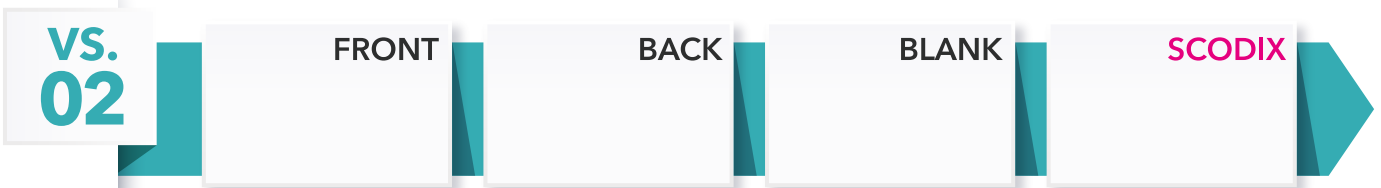

First page including the front design of your business card. Second page including the back design. Third page left blank. Fourth page with the Scodix element set in a spot colour.

Please do not supply the front and back pages of the business cards together with the scodix layer in a separate PDF. Also ensure artwork is not supplied without a blank page as this will cause automatic rejection.

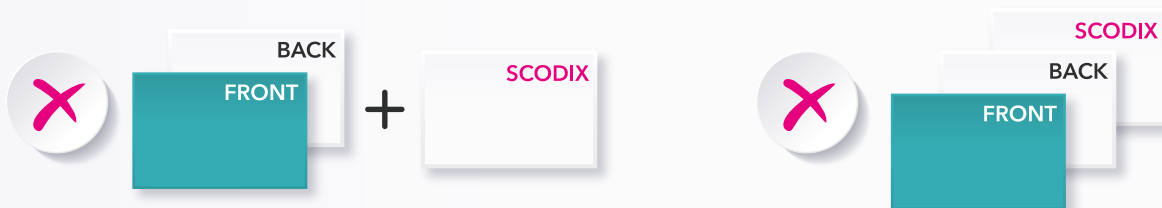

PLEASE NOTE SCODIX IS ONLY AVAILABLE ON ONE SIDE AND CANNOT BE APPLIED OVER CREASED AREAS OF FOLDED PRODUCTS. BE SURE TO LEAVE 2MM GAP FROM EDGE OF TRIM AREA AS WELL AS 2MM AWAY FROM ANY FOLD AREAS.